
Features TO-C203BL

- · Available in 28 finishes including 13 PVD finishes
- · All brass construction
- · Less head, arm, flange, and spout
- Requires rough-in (3-VR) sold separately





Codes/Standards

Product meets or exceeds the following:

ASME A112.18.1/CSA B125.1



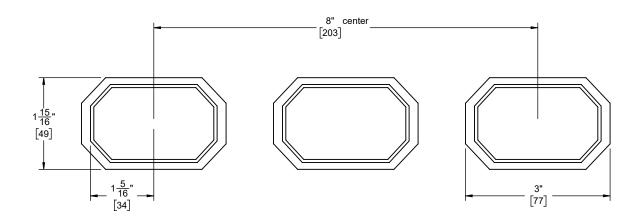



Through-Hole Specifications

 Min
 Recommended
 Max

 Valve:
 Ø 1-1/8" [24]
 Ø 1-3/8" [32]
 Ø 1-5/8" [41]

 Diverter:
 Ø 1-1/2" [38]
 Ø 1-1/2" [38]
 Ø 1-5/8" [41]

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]