


TOP VIEW

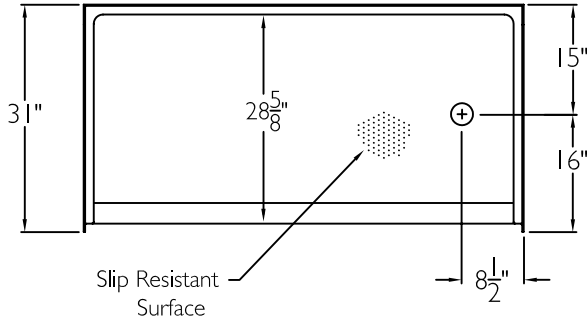


SUBMITTAL

This shower enclosure shall be model SSB 6030 BF 1.0 Base left or right drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 60" x 31" x 4 1/2" with a 1.0" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.



FRONT VIEW

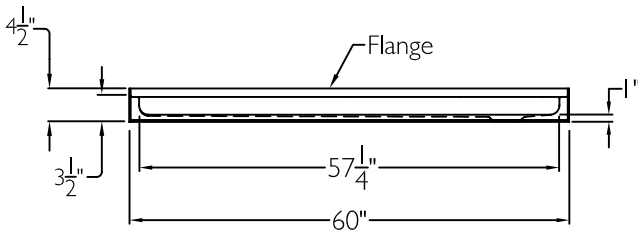

The enclosure shall be equipped with the following features:

- 1) Low entry change of level threshold,
- 2) EasyBase™ self sustaining bottom,
- 3) Slip resistant surface on floor,
- 4) Solid Surface finish,
- 5) 1.0" threshold.

SIDE VIEW

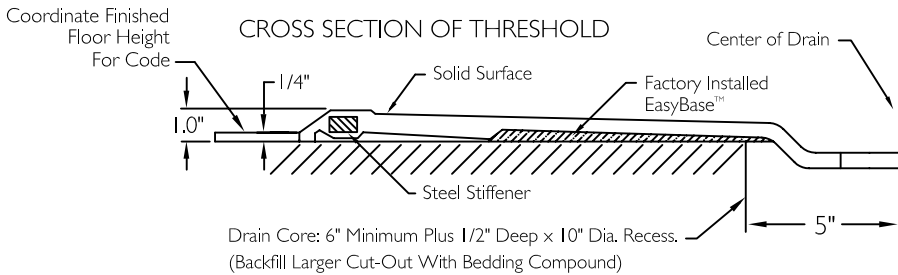

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 60" AND 31". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: SST 6030 BF 1.0 COL L-R.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No  Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfordesignsbathware.com	Architect			Model No. SSB 6030 BF 1.0 COL L-R Base-I	
	Engineer			Drawing No. SSB 6030 BF 1.0 COL L-R EB	
	Rep			Date Issued. 4-21-12	Drawing Rev.
	Wholesaler			Material. Solid Surface	
	Comments			Color:	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	