

G1993 Safety Station with Eye/Face Wash, PVC Construction with Stainless Steel Valves

Application: All-PVC combination eye/face wash and shower safety station. Unit is constructed of PVC, PVC-coated components and stainless steel valves for superior corrosion resistance. Ideal for industrial environments where harsh acids or caustics are present. Eye/face wash features two large FS-Plus[™] spray-type outlet heads that deliver a flood of water for rinsing eyes and face.

Shower Head: 10" diameter orange ABS plastic with 20 GPM flow control.

Shower Valve: 1" IPS Type 316 stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

Spray Head Assembly: Two FS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from water flow.

Eye/Face Wash Bowl: 11-3/4" diameter orange ABS plastic.

Eye/Face Wash Valve: 1/2" IPS Type 316 stainless steel stayopen ball valve. Valve has stainless steel ball and PTFE seals.

Pipe and Fittings: Schedule 80 PVC.

Supply: 2" IPS socket weld top female inlet. Waste: 2" IPS socket weld female outlet. **Sign:** ANSI-compliant identification sign.

Quality Assurance: Valve and spray head assemblies are factory assembled and water tested prior to shipment.

Available Options

| G6040 Thermostatic mixing valve precisely blends hot |
|--|
| and cold water to deliver tepid water as required by ANSI |
| Z358.1-2014. Refer to "Thermostatic Mixing Valves" section |
| for complete technical and product selection information. |

GRN Green ABS plastic shower head and bowl.

YEL Yellow ABS plastic shower head and bowl.

SSH Stainless steel shower head.


AP275-200 Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when eye/face wash or shower is activated. Furnished complete with flow switch and mounting hardware.







☐ **G1993** Safety Station with Eye/Face Wash, PVC Construction with Stainless Steel Valves

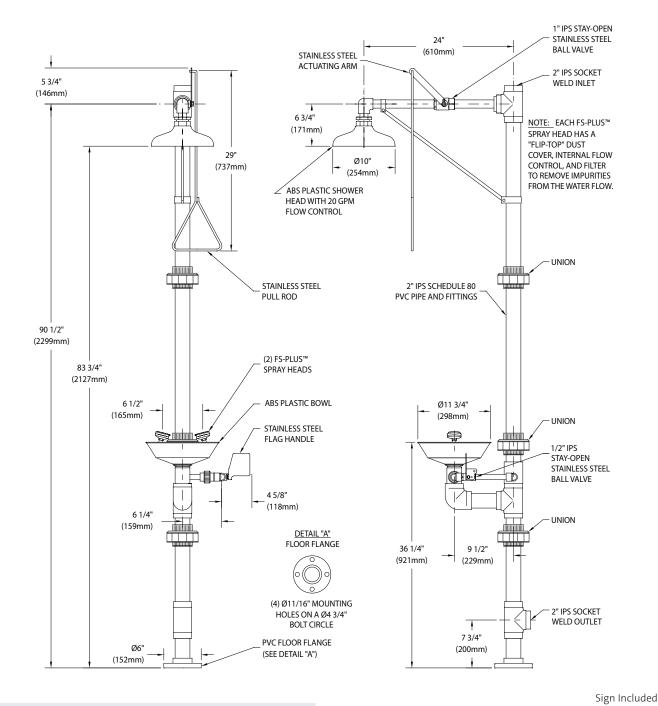

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are \pm 1/4" (6mm). rev. 021023

Shower/Eyewash

UPC