147-155RH QUANTUM® 1.28

Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance pressure-assist, high efficiency toilet (HET)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Uses 20% less water than conventional toilets
- Elongated front bowl
- 12' rough-in
- Model 49RH chrome-plated, metal trip lever
- 2-1/8' glazed trapway
- The Mansfield[®] limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- Available in White, Biscuit and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
147-155RH	Elongated front, pressure-assist, two-piece toilet. Less toilet seat and supply. Specify color.		
147	Elongated front, pressure-assist bowl only. Less toilet seat and supply. Specify color.		
155RH*	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.		
TANK OPTIONS		TULET	
155*	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.		
TANK TRIM & RI	EPLACEMENT PARTS		
49RH	Trip lever - chrome-plated, metal trip lever, right hand		
125-LID	Tank lid		
FLUSHMATE® 503	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.		



147-155RH QUANTUM® 1.28

Elongated Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
147-155RH	Elongated front (1.28 gpf / 4.8 lpf) two-piece toilet	NIGH EFFICIENCY NIGH EFFICIENCY CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9-7/8' X 12-1/4'
ROUGH-IN	12'
MAP RATING	Pending

TRAP DIAMETER	2-1/8'
TRAP SEAL	2-7/8'
SHIPPING WEIGHT	Model 147 - 55 lbs. (25 kg) Model 155RH - 41 lbs. (18.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

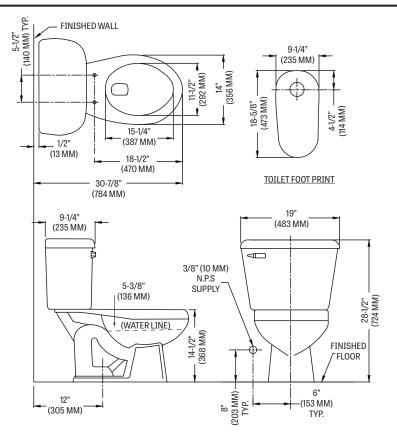



Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.