



**VANDAL RESISTANT, BI-LEVEL VERSACOOLER® II W/ VERSA FILTER**

**Energy and Water Conservation Technology  
PGVF8ACSL, PGVFACSL**

**Suggested Specification**

Model PGVF8ACSL shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PGVFACSL is a non-refrigerated fountain. Shall have VersaFilter for taste, odor, lead and chlorine reduction. Shall include a single vandal resistant push button to activate the flow of water. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler to reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel. Cabinet shall have perforated galvanized steel screens to prevent objects from being inserted into the cooler. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

**Models**

- PGVF8ACSL delivers 8.0 gallons of chilled drinking water per hour
- PGVFACSL is a non-refrigerated fountain

**Standard Features**

- Universal design allows for universal installation
- Built-in 100 micron strainer stops particles before they enter the waterway
- VersaFilter for taste, odor, lead and chlorine reduction
- Vandal resistant water saver bubbler with flexible guard
- Vandal resistant mechanical front push button
- Vandal resistant fasteners
- Galvanized steel louver and bottom screens
- Waterways are Lead-Free in materials & construction
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system

**Finishes**

- Standard cabinet finish: Stainless steel

**Installation**

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

**Options (at additional cost)**

- One piece chrome plated brass bubbler (036700-001)
- Cane apron (035174-003)
- Filter replacement cartridge (033879-001)

**Limited 5-Year Warranty**

(Continental limits of the United States and Canada)  
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty**

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

**Certifications/Compliance**

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGVF8ACSL	8.0	8.0	No	No	1/4	4.4	460	No	No	95 Lbs
PGVFACSL	Fountain Only							No	No	65 Lbs

\* Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

# OASIS® VERSACOOLER® II

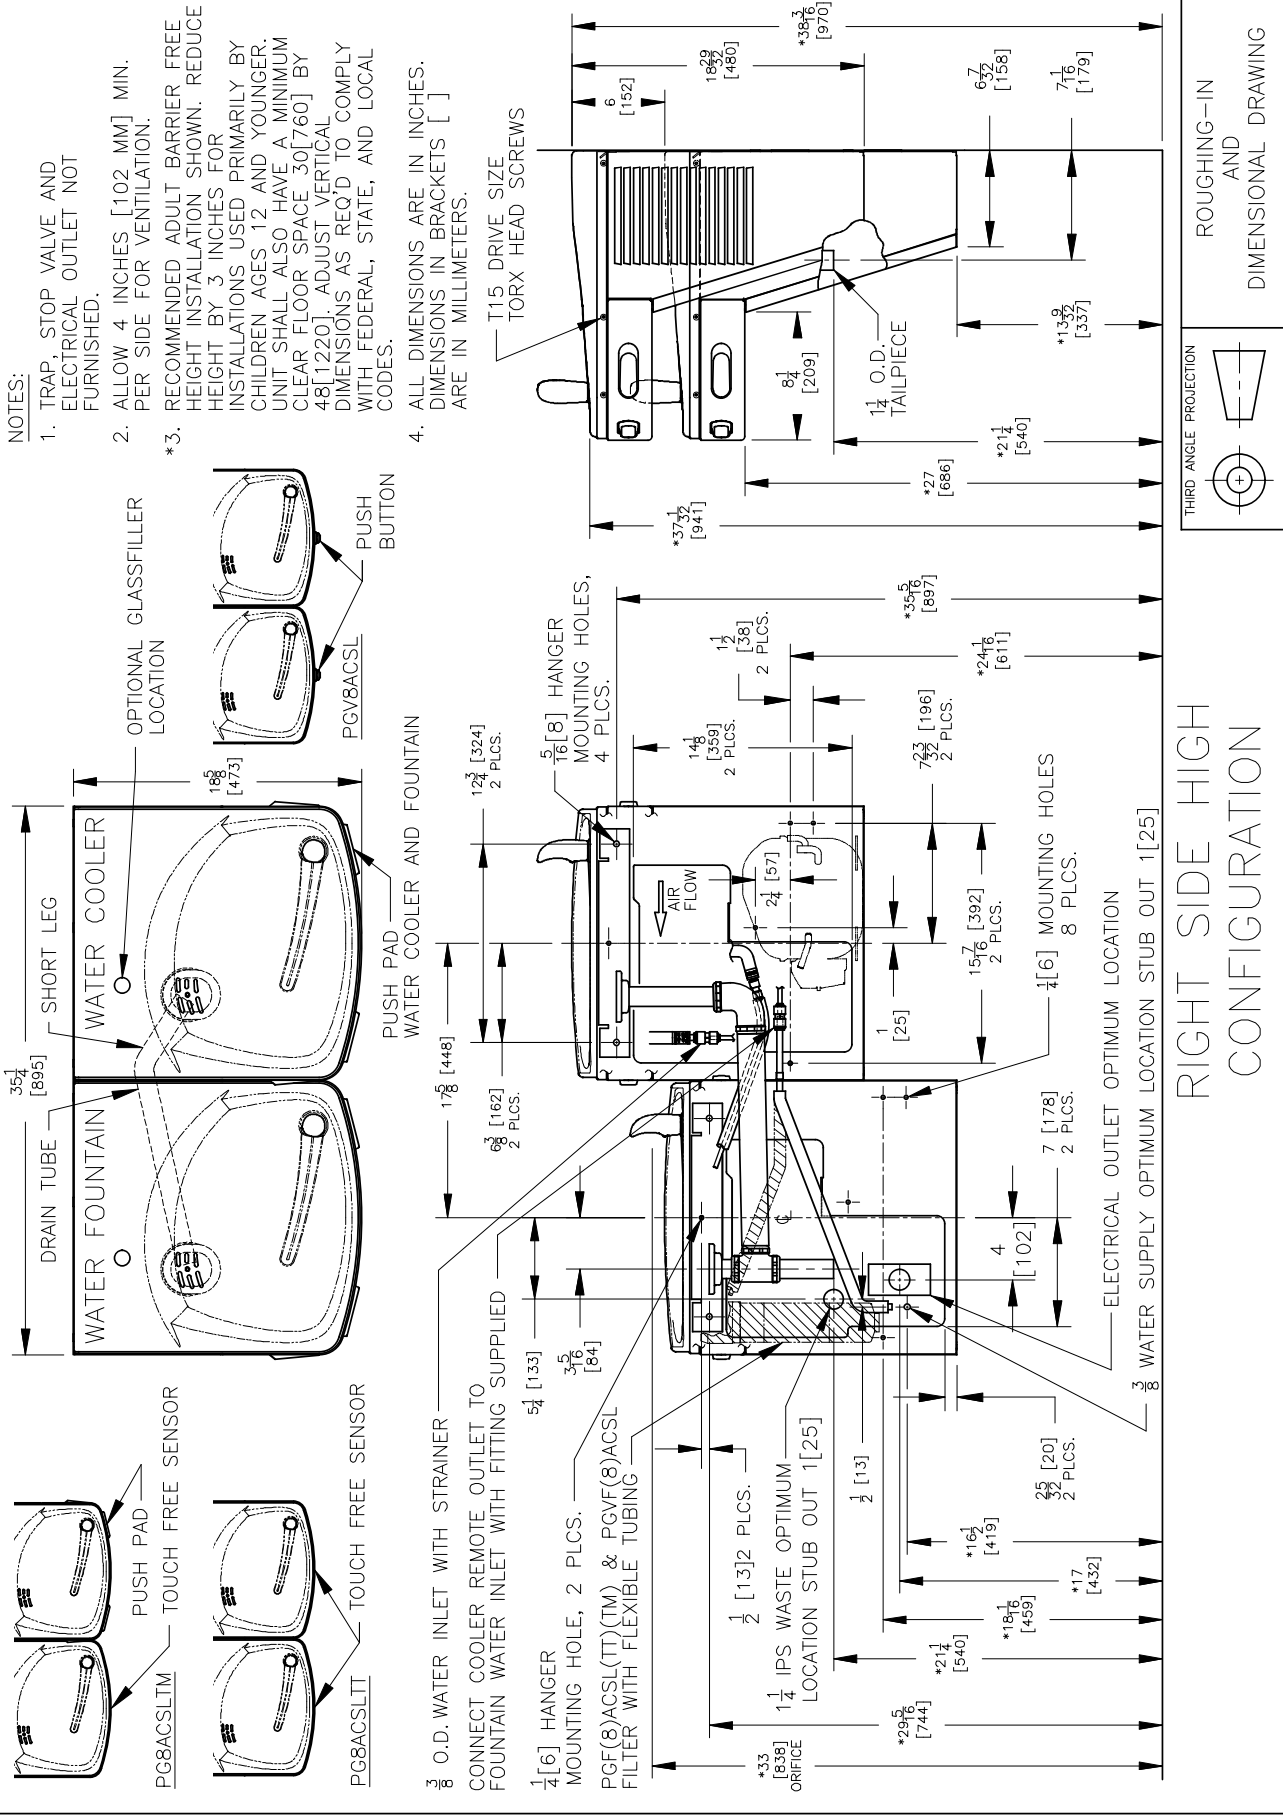

Oasis International, 222 East View Campus View Blvd., Columbus, OH 43235  
 For customer service and technical helpline assistance call: 800.950.3226



[www.oasiscoolers.com](http://www.oasiscoolers.com)

Oasis and VersaCooler are registered trademarks of LVD Acquisition, LLC dba Oasis International. © 2015 LVD Acquisition