
# PEERLESS.

## Mounting without escutcheon plate: Min.2 1/2" (64 mm) Clearance to Back 3 5/8" Splash Recommended -(92 mm) → 2 7/16" (62 mm) 5 1/16" 9 15/16" (129 mm) (253 mm) 6 7/8" (174 mm) 1 5/16"~1 1/2" (33~38mm) 2 1/4" Hole Size (64 mm) Max. Deck 28 3/4" Thickness 731 mm)

3/8" compression fitting

## Min.2 1/2" (64 mm) Mounting with escutcheon plate: Clearance to Back Splash Recommended 3 5/8" (92 mm) <sup>3</sup> 2 7/16" 10 5/16" (62 mm) (262 mm) 5 1/16" (129 mm) 7 1/4" (184 mm) 6" (152 mm) 2 1/16" (53 mm) 1 5/16"~1 1/2" (33~38mm) 1 7/8" Hole Size (48 mm) Max. Deck 28 3/4" **Thickness** 731 mm) 3/8" compression fitting

# P1823LF▲

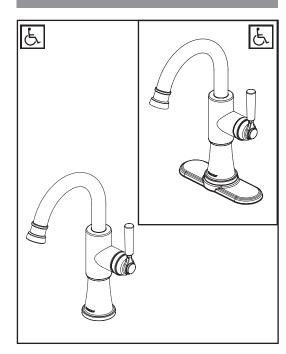

# **BAR & PREP** SINK FAUCETS

- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications

### STANDARD SPECIFICATIONS:

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Solid brass casted body
- One or three hole mount (escutcheon included)
- Ceramic cartridge
- Spout rotates 360°
- Red/Blue indicator markings
- Polymer braided flexible supply hose with 3/8" compression fitting - 28 3/4" (731mm) long

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and inishes; or, for commercial users, for 5 years from the date of purchase.
  5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1