



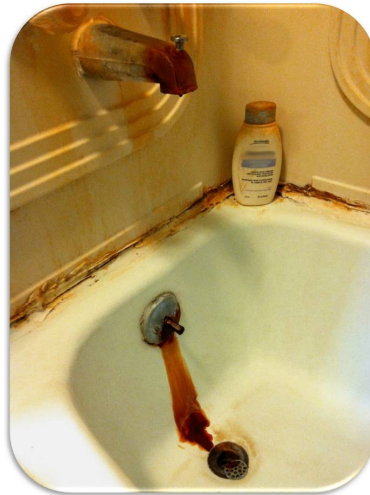

- Reduces stains
- Eliminates odors
- Brighter laundry
- Protects plumbing

OXY2™ Series

Iron Reduction System

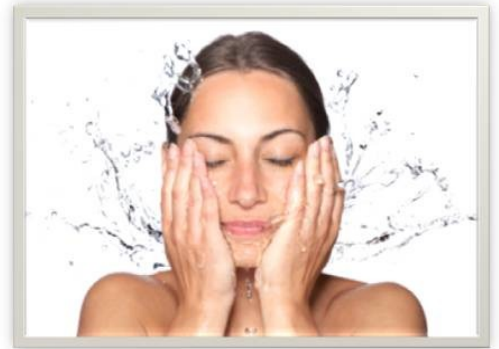

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**

- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.
- **Automatic pH Adjustment.** Specialty filter media automatically adjusts pH for iron & manganese reduction.



| Model Number | Media cu. ft. | Backwash Rate Required @ 40 psi | Service Flow Rate (gpm) | | Overall Dimensions | | | Pipe Size |
|--------------|---------------|---------------------------------|-------------------------|-------|--------------------|-----|-----|-----------|
| | | | Peak | Cont. | L | W | H | |
| OXY2-10 | 1.0 | 5 GPM | 9 | 3 | 12" | 15" | 64" | 1" |
| OXY2-20 | 2.0 | 7 GPM | 13 | 5 | 13" | 15" | 64" | |
| OXY2-10M | 1.0 | 5 GPM | 9 | 3 | 12" | 15" | 64" | |
| OXY2-20M | 2.0 | 7 GPM | 13 | 5 | 13" | 15" | 64" | |

NOTE: Residential OXY2 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice. "M" suffix is used for manganese reduction.

