

# DWV PIPE HANGER

» 553 SERIES

HangsTuff™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief's 553 series HangsTuff™ DWV pipe hanger shall be used where necessary to secure Schedule 40 DWV piping according to all national code requirements. Hanger shall be 100% corrosion proof and UV resistant. Hanger shall be impact resistant to 0°F, and be able to withstand temperatures up to 140°F.

Hanger shall feature I-beam design for strength and rigidity with a locking finger device that is designed to hold the pipe in place when installed at all angles. Hanger shall be IAPMO certified (excludes 553-830W). Hanger shall include zinc-plated ring shank nails for more permanent installation.

## INSTALLATION

Secure hanger to stud or joist using both ring shank nails in accordance with national or local plumbing codes.

## MATERIALS

**Hanger:** ABS, U.V. resistant, corrosion-proof, impact-resistant

**Nail:** 1<sup>5</sup>/<sub>8</sub>" zinc-plated, continuous ringshank

## SAFE WORKING LOADS

Pipe size:	<b>1½"</b>	<b>2"</b>	<b>3"</b>	<b>4"</b>
Cradle:	40 lbs.	50 lbs.	45 lbs.	40 lbs.
Inverted:	15 lbs.	15 lbs.	15 lbs.	15 lbs.


## DIMENSIONS

	<b>1½"</b>	<b>2"</b>	<b>3"</b>	<b>4"</b>
<b>A:</b> Length to center of pipe	8 <sup>5</sup> / <sub>8</sub> "	8 <sup>15</sup> / <sub>16</sub> "	9 <sup>7</sup> / <sub>16</sub> "	9 <sup>15</sup> / <sub>16</sub> "
<b>B:</b> Length of hanger	10"	10½"	11¾"	12 <sup>3</sup> / <sub>8</sub> "
<b>C:</b> Length to gripping finger	7½"	7½"	7½"	7½"
<b>D:</b> Distance between nailways	1"	1"	1"	1"



553-9W

553-8

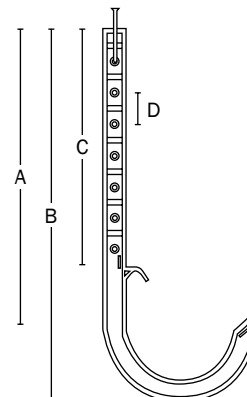

Except for 553-830W  
Made in USA

Create Item Number

## 553-AB

e.g. 553-8W: white 3" Sch. 40 HangsTuff™

### PIPE SIZE A

- 6 = 1½" Sch. 40
- 7 = 2" Sch. 40
- 8 = 3" Sch. 40
- 830 = 2" Sch. 30\*
- 9 = 4" Sch. 40

### COLOR B

- W = white
- \_ = (blank) black

\*553-830W available in white only