

DWV PIPE HANGER

» 553-WZ SERIES

Swivel J-Hanger™

SPECIFICATION

Sioux Chief 553-WZ series Swivel J-Hanger™ DWV pipe hanger shall be used where necessary to support drain, waste and vent pipes according to all national and local code requirements. Hanger shall be corrosion proof and UV resistant. Hanger material shall be impact resistant at 0°F with a maximum temperature rating of 140°F and allow for thermal expansion and contraction of the pipe.

Hanger shall swivel 360-degrees to support pipe from any direction. Rust resistant, continuous ring shank nails shall be provided.

INSTALLATION

Refer to and follow national and local codes pertaining to pipe slope and DWV hanger spacing. With nails provided, secure hanger to stud or joist. Lay pipe on top of hook once cradle is positioned to correct direction of pipe run. Push pipe into hanger cradle to secure.

MATERIALS

Hanger: UV-resistant white ABS

Nails: 1 $\frac{3}{8}$ " ring-shank, zinc-plated


DIMENSIONS

DWV pipe size	1 $\frac{1}{2}$ "	2"	3"	4"
A: Top of stem to pipe center-line	9"	9"	9 $\frac{1}{16}$ "	9 $\frac{1}{16}$ "
B: Overall length	10 $\frac{1}{8}$ "	10 $\frac{5}{16}$ "	11 $\frac{1}{8}$ "	11 $\frac{1}{8}$ "
C: Stem length	8 $\frac{1}{2}$ "	8 $\frac{1}{2}$ "	8 $\frac{1}{2}$ "	8 $\frac{1}{2}$ "
D: Distance between nail holes	1"	1"	1"	1"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



553-8WZ

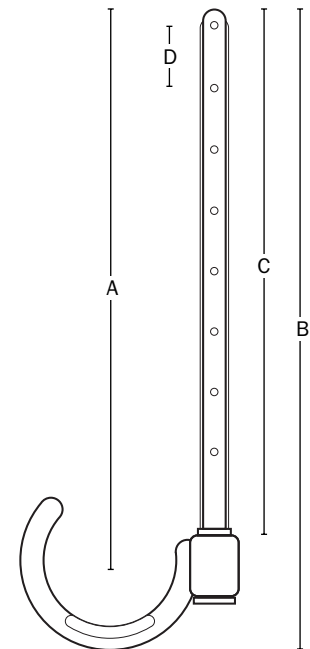

Made in USA

Create Item Number

553-AWZ

e.g. **553-6WZ:** 1 $\frac{1}{2}$ " DWV swivel pipe hanger

DWV PIPE SIZE A

- 6 = 1 $\frac{1}{2}$ "
- 7 = 2"
- 8 = 3"
- 9 = 4"