







Location:

# SYMMONS® Identity™


the smart choice™

6703  
Hand Shower System  
Specification Submittal



<h3>Feature Highlights</h3> <ul style="list-style-type: none"> <li>• Metal lever handle</li> <li>• Adjustable stop screw to limit handle turn</li> <li>• Cradle for hand shower</li> <li>• 60" flexible metal hose</li> <li>• 1 mode hand shower</li> <li>• Dual checks for backflow protection</li> <li>• 2.5 gpm (9.5 L/min) standard flow restrictors</li> <li>• Components shall be metal and nonmetallic construction, plated in standard polished chrome finish</li> <li>• For optional in-line vacuum breaker order p/n EF-109</li> </ul>	<h3>Options/Modifications cont.</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>-L/HS</b> <i>Less hand shower</i></li> <li><input type="checkbox"/> <b>-QD</b> <i>Quick-disconnect on hand spray units</i></li> <li><input type="checkbox"/> <b>-R</b> <i>60" white vinyl hose in place of 60" metal hose</i></li> <li><input type="checkbox"/> <b>-REB</b> <i>Rebuild trim kit, includes TA-10 and TA-4</i></li> <li><input type="checkbox"/> <b>-REV</b> <i>Reverse coring, hot on right, cold on left, for back to back installations</i></li> <li><input type="checkbox"/> <b>-T724</b> <i>24" slide bar/grab bar with ADA hand shower</i></li> <li><input type="checkbox"/> <b>-T736</b> <i>36" slide bar/grab bar with ADA hand shower</i></li> <li><input type="checkbox"/> <b>-T748</b> <i>48" slide bar/grab bar with ADA hand shower</i></li> <li><input type="checkbox"/> <b>-TRM</b> <i>Trim only, valve must be ordered separately</i></li> <li><input type="checkbox"/> <b>-VB</b> <i>Elevated vacuum breaker</i></li> <li><input type="checkbox"/> <b>-VP</b> <i>Vandal resistant escutcheon screws in place of standard screws</i></li> <li><input type="checkbox"/> <b>-X</b> <i>Integral service stops - allows water shutoff at valve for service</i></li> <li><input type="checkbox"/> <b>-STN</b> <i>Satin Nickel finish</i></li> </ul>
<h3>Model Numbers</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>6703</b> Hand Shower System with Symmons Temptrol® 4-port pressure balancing mixing valve</li> <li><input type="checkbox"/> <b>46-2-BODY</b> Symmons Temptrol 4-port pressure balancing mixing valve</li> <li><input type="checkbox"/> <b>46-2X-BODY</b> Symmons Temptrol 4-port pressure balancing mixing valve with integral service stops</li> </ul>	<p><b>Note:</b> Append appropriate -suffix to model number.</p>
<h3>Options/Modifications</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>-1.5</b>  <i>1.5 gpm (5.7 L/min) flow restrictor</i></li> <li><input type="checkbox"/> <b>-2.0</b> <i>2.0 gpm (7.6 L/min) flow restrictor</i></li> <li><input type="checkbox"/> <b>-72</b> <i>72" hose in place of 60" hose</i></li> <li><input type="checkbox"/> <b>-ADACHS</b> <i>ADA hand shower wand (chrome)</i></li> <li><input type="checkbox"/> <b>-ADAHS</b> <i>ADA hand shower wand (white)</i></li> <li><input type="checkbox"/> <b>-B30</b> <i>30" slide bar in place of wall cradle</i></li> <li><input type="checkbox"/> <b>-B48</b> <i>48" slide bar in place of wall cradle</i></li> <li><input type="checkbox"/> <b>-CHKS</b> <i>Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve</i></li> <li><input type="checkbox"/> <b>-EX</b> <i>Exposed column/slide bar, hand shower bracket and hand shower wand (35EX)</i></li> <li><input type="checkbox"/> <b>-H321-V</b> <i>1 mode hand shower unit with slide bar</i></li> <li><input type="checkbox"/> <b>-H323-V</b> <i>3 mode hand shower unit with slide bar</i></li> <li><input type="checkbox"/> <b>-H323-V-48</b> <i>3 mode hand shower unit with 48" slide bar</i></li> <li><input type="checkbox"/> <b>-H3524</b> <i>24" decorative slide/grab bar with ADA hand shower</i></li> <li><input type="checkbox"/> <b>-H3536</b> <i>36" decorative slide/grab bar with ADA hand shower</i></li> <li><input type="checkbox"/> <b>-IPS</b> <i>1/2" female IPS connections</i></li> <li><input type="checkbox"/> <b>-LP</b>  <i>Loop handle</i></li> <li><input type="checkbox"/> <b>-LR</b>  <i>Lever handle</i></li> </ul>	<h3>Compliance</h3> <p>- ASME A112.18.1/CSA B125.1</p> 
	<h3>Warranty</h3> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.  Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>

## Dimensions

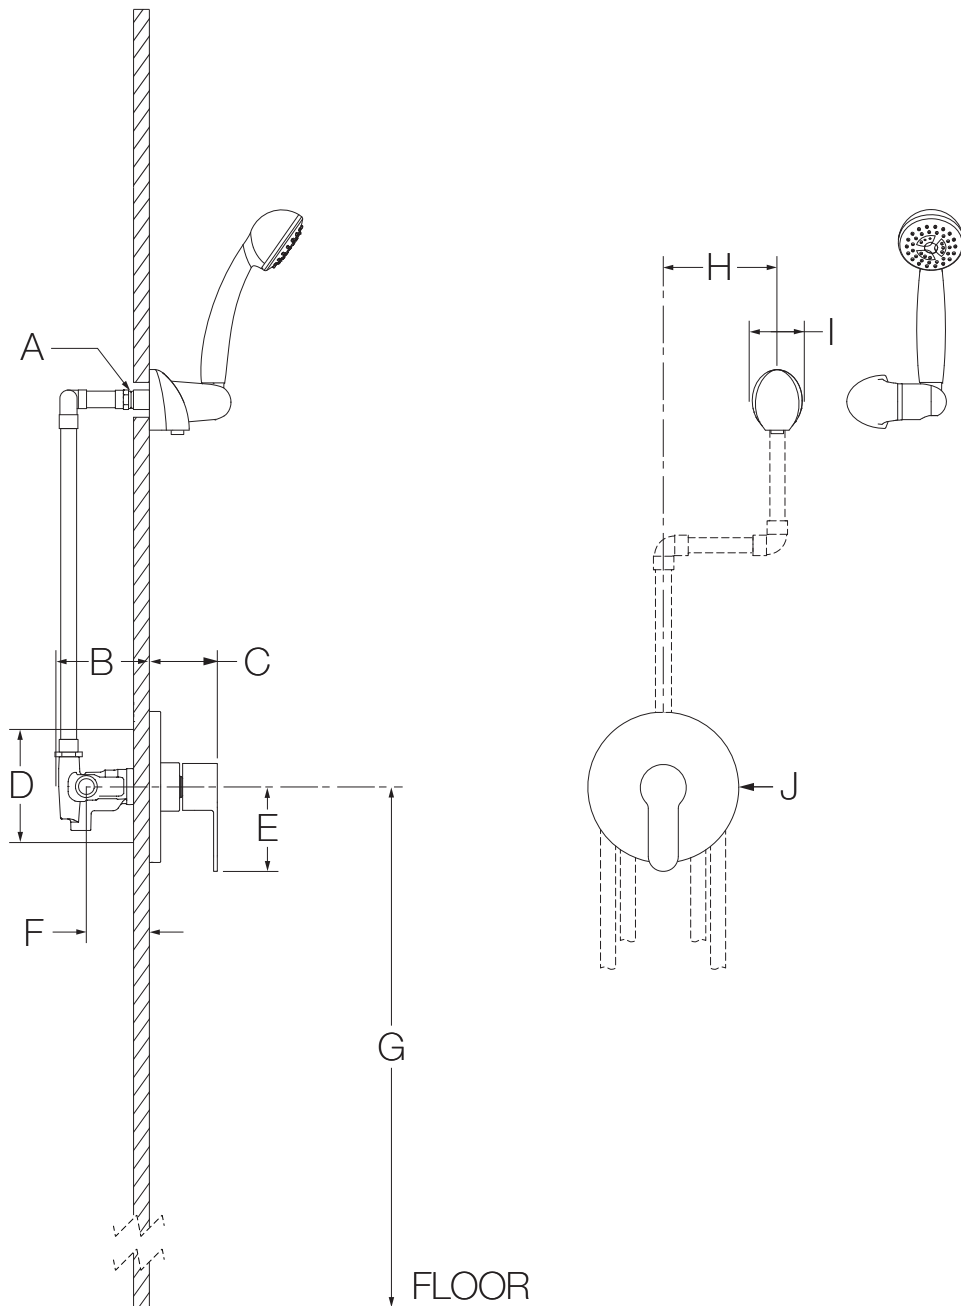

Measurements	
A	Male 1/2" NPT fitting must be recessed 1/4" (6 mm) from finished wall
B	3-1/2", 89 mm
C	2-7/8", 73 mm
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	3-1/2", 89 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 32", 813 mm
H	6", 152 mm
I	2-1/8", 54 mm
J	Ø 6-3/8", 162 mm

### Notes:

- 1) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 2) Do not install positive shut-off device/devices that do not allow the valve to flow at least 1.5 gpm to valve outlets.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.