









SYMMONS®
the smart choice™


Location:

S-9603-PLR
Hand Shower System
Specification Submittal



Specification	Modifications
<p>Hand shower system powered by the Temptrol® Pressure Balancing valve with integral volume control. Hand shower system shall include adjustable stop screw to limit handle turn, 36" slide bar, in-line vacuum breaker, 60" flexible metal hose, ADA hand shower and standard 2.5 gpm (9.5 L/min) flow restrictor. Components shall be made from metal and nonmetallic construction, plated in standard polished chrome finish.</p>  	
<p>Model Numbers</p>	
<p><input type="checkbox"/> S-9603-PLR <i>Origins hand shower system</i></p> <p><input type="checkbox"/> S-9603-PLR-TRM <i>Origins hand shower, trim only</i></p> <p><input type="checkbox"/> S-46-1-BODY <i>Temptrol Pressure Balancing shower valve body</i></p> <p><input type="checkbox"/> S-46-1X-BODY <i>Temptrol Pressure Balancing shower valve body with stops</i></p>	<p><input type="checkbox"/> CG -1.5 1.5 gpm (5.7 L/min) flow restrictor</p> <p><input type="checkbox"/> -2.0 2.0 gpm (7.6 L/min) flow restrictor</p> <p><input type="checkbox"/> -72 72" hose in place of 60" hose</p> <p><input type="checkbox"/> -ADAHS ADA hand shower wand (white)</p> <p><input type="checkbox"/> -B Brass escutcheon (chrome only)</p> <p><input type="checkbox"/> -B30 30" slide bar in place of 36" grab bar</p> <p><input type="checkbox"/> -B48 48" slide bar in place of 36" grab bar</p> <p><input type="checkbox"/> -CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve</p> <p><input type="checkbox"/> -D Brass dome cover (chrome only)</p> <p><input type="checkbox"/> -H321-V 1 mode hand shower unit with slide bar in place of standard hand shower unit</p> <p><input type="checkbox"/> -H323-V 3 mode hand shower unit with slide bar in place of standard hand shower unit</p> <p><input type="checkbox"/> -IPS 1/2" female IPS connections</p> <p><input type="checkbox"/>  -LAM Lever handle</p> <p><input type="checkbox"/>  -LP Loop handle</p> <p><input type="checkbox"/> -L/HS Less hand shower</p> <p><input type="checkbox"/> -OP 13" oval plate (PLR only)</p> <p><input type="checkbox"/> -QD Quick-disconnect on hand spray units</p> <p><input type="checkbox"/> -R 60" white vinyl hose in place of 60" metal hose</p> <p><input type="checkbox"/> -REB Rebuild trim kit, includes TA-10 and TA-4</p> <p><input type="checkbox"/> -REV Reverse coring, hot on right, cold on left, for back to back installations</p> <p><input type="checkbox"/> -T724 24" slide bar/grab bar with ADA hand shower in place of standard hand shower unit</p> <p><input type="checkbox"/> -T748 48" slide bar/grab bar with ADA hand shower in place of standard hand shower unit</p> <p><input type="checkbox"/> -VB Elevated vacuum breaker</p> <p><input type="checkbox"/> -VP Vandal resistant escutcheon screws in place of standard screws</p> <p><input type="checkbox"/> -X Integral service stops - allows water shutoff at valve for service</p>
<p>Finish Options</p>	
<p><input type="checkbox"/> -STN <i>Satin Nickel finish</i></p>	
<p>Compliance</p> <p>-ASME A112.18.1/CSA B125.1</p> <p>-WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</p>  	
<p>Warranty</p>	
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>	<p>Note: Append appropriate -suffix to model number.</p>

Dimensions

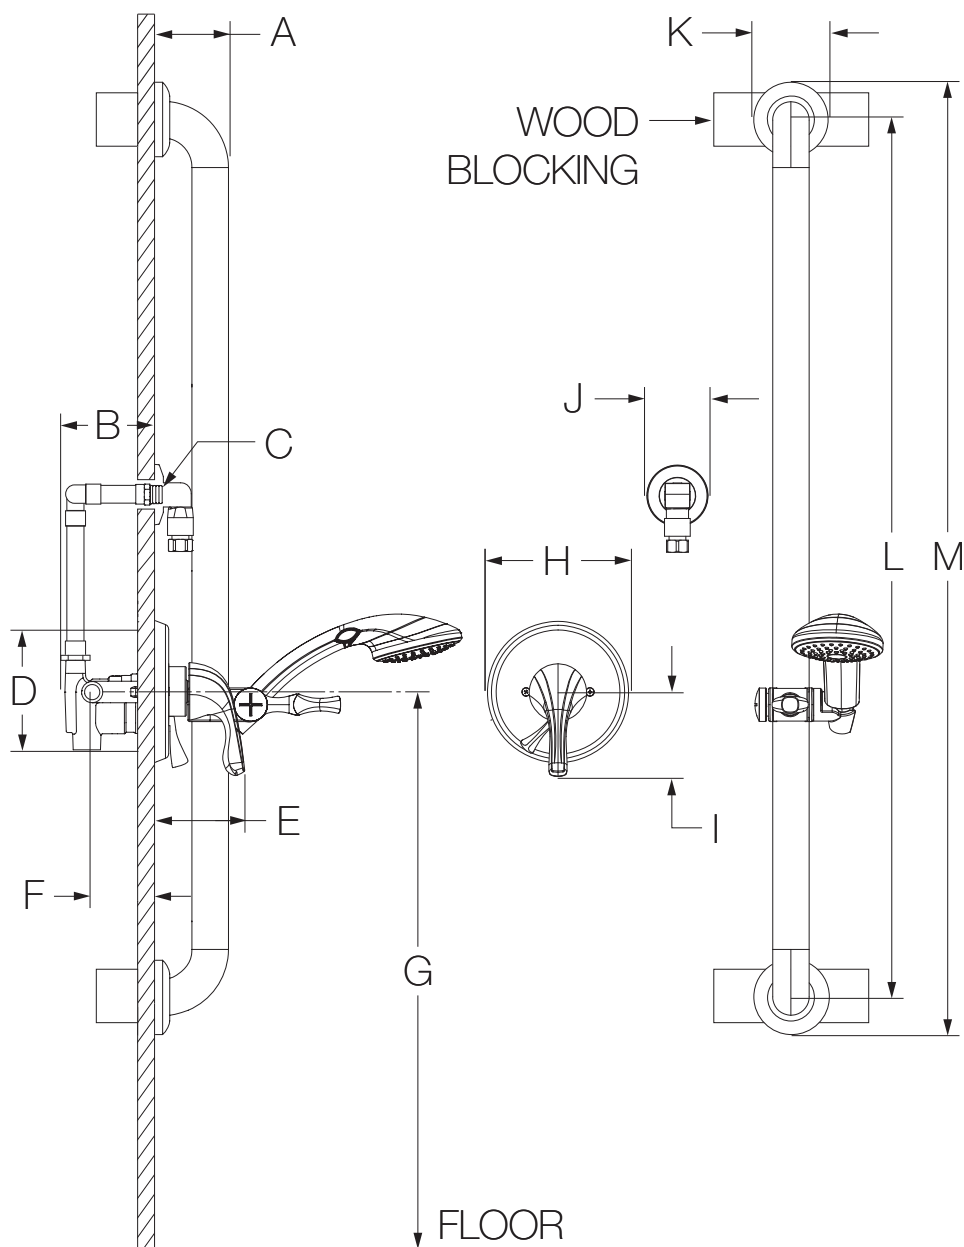

Measurements	
A	3", 76 mm
B	3-1/2", 89 mm
C	Male 1/2" NPT fitting must protrude 3/8" from finished wall
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	3-5/8", 92 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 32", 813 mm
H	Ø 5-3/4", 146 mm
I	3-3/8", 86 mm
J	Ø 2-1/2", 64 mm
K	Ø 3-1/8", 79 mm
L	36", 914 mm
M	39", 991 mm

Notes:

- 1) All dimensions measured from nominal rough-in (see F as reference).
- 2) Dimensions subject to change without notice.