

When it comes to protecting your good name

Accessories and Controls, continued

THE aquanot[®] Series by ZOELLER

- Operates on 3 AAA batteries.
- Low battery alarm designed into circuit board.
- Warns you when sensor contacts water.
- On/Off silence switch.
- Stainless steel sensor contacts.
- Easy to install, portable & safe!
- Compact design (3 1/4" x 2 1/4").
- Loud horn (low battery alarm).
- No adjustments needed.
- Solid state electronic components.
- 5 ft. of lead wire.
- 12 month limited warranty.
- AC power adapter capability. Requires Class 2 transformer, Input: 120 VAC/60 Hz. Output: 4.5 VDC/150 mA. (available at most electronic stores).



See FM1617

"PREWIRED CONDUIT & J-BOX ASSEMBLIES"

Zoeller Pre-Wired Conduit assemblies simplify the electrical portion of any pump job. Instead of an electrical job taking a half a day to get power to the lift station, it now takes only minutes. Zoeller has engineered flexible, watertight conduit and junction box assemblies to assist in getting the job done quickly and efficiently. These assemblies take the guesswork out of getting power to the pumps. Systems are available with the correct number of wires of the correct gauge.

Features:

- Corrosion resistant.
- All UL Listed components.
- Pre-drilled and assembled J-box.
- Fast easy hook-up of electrical components.
- Watertight components.
- 25', 35', 50', 75', and 100' lengths available.
- Assemblies rated for pumps up to 15 amps in 115, 200/208 and 230 volts single phase and cord sizes less than 1/2" diameter. See FM2080.



"J-BOXES"


PVC Plastic box with removable cover for use in sewage, effluent, dewatering, or corrosive environments. Box is 4" X 4" X 2" deep. Box is field drilled for maximum flexibility in each installation.



10-0770

"QWIK-Box"

- Used for outdoor plug in connection for pumps & alarm systems
- Sealed watertight enclosure- NEMA 4X
- 115V or 230V receptacle.
- Power line permanently sealed.
- Gas-tight rubber seals for switch and pump cords
- Indoor alarm (Optional)
- Used on septic tank risers.

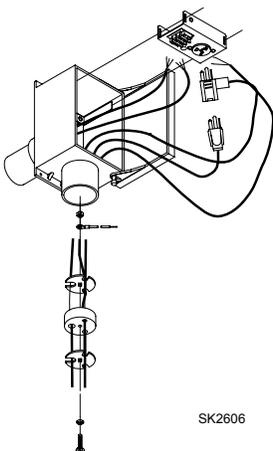

See FM1420

"SWITCH-MATE" PUMP FLOAT SWITCHES

SINGLE PIGGYBACK VARIABLE LEVEL FLOAT SWITCH

- See FM0477 for corresponding pump.
- Converts nonautomatic pump to automatic.
- Adjustable variable level (6" min. to 36" max.).
- 10', 15', & 20' cord with molded plug.
- Can be used on Simplex Controls.
- Temperature rating 140°F (60°C).
- 10-0055 - 115V, 1/2 HP, 13 max. Amps, 10'
- 10-0034 - 115V, 1/2 HP, 13 max. Amps, 15'
- 10-0035 - 230V, 1 HP, 13 max. Amps, 15'
- 10-0032 - 115V, 1 HP, 15 max. Amps, 15'
- 10-0033 - 230V, 2 HP, 15 max. Amps, 15'
- 10-0063 - 115V, 1/2 HP, 13 max. Amps, 20'
- 10-0706 - 230V, 1 HP, 13 max. Amps, 20'
- 10-0705 - 115V, 3/4 HP, 15 max. Amps, 20'
- 10-0559 - 230V, 2 HP, 15 max. Amps, 20'

DOUBLE PIGGYBACK VARIABLE LEVEL FLOAT SWITCH

- Converts nonautomatic pump to automatic.
- Adjustable pump range (1" min. to 48" max.).
- Standard 15' cord with molded plug.
- Can be used on Simplex Controls.
- Temperature rating 140°F (60°C).
- 10-0229 - 115V/max. 1 HP
- 10-0230 - 230V/max. 2 HP



"U.L. Listed. Refer to catalog and price sheet for corresponding pump.
Note: HP rating refers to Zoeller pumps only.

Product may not be exactly as pictured.



Mercury products are not approved for sale in: CT, RI (1-1-06), ME (7-4-06), IL (7-1-07), CA (1-1-06). Please review latest IMERC notification for additional information.